




Recommended System Designs

Eidos 265 LA

Compact line array element

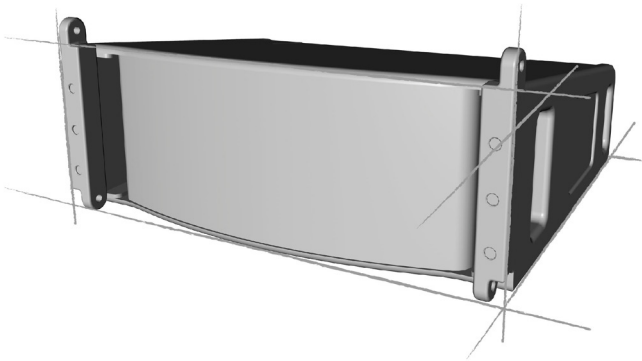

[•-] sound vision.

Eidos 265 LA Recommended System Designs
Version: 0350
Release date: 2025/07/21
© Outline 2025. All rights reserved.

Refer all servicing to qualified personnel, through your Outline dealer.

System description.

PRODUCT DESCRIPTION: EIDOS 265 LA is a passive loudspeaker line array element. It features two 6.5" mid-woofers (1.75" voice coil and ferrite magnet) and a 1.4" throat-exit compression driver (2.5" voice coil) on a dedicated waveguide. Between the two bandwidths, filtering is carried out by an internal passive cross-over, utilizing top-grade components. Each EIDOS 265 LA has a nominal impedance of 8 Ω and can handle up to 500 W AES and 2000 W peak. Connection is in the form of two NL4 wired in parallel.

KITS DESCRIPTION: These configurations ensure the best ratio between loudspeakers & amplifiers quantity, thus becoming an excellent investment with a fast economic return. Their strong plug&play vocation has been ensured by providing all the necessary accessories to provide complete solutions.

EIDOS 265 LA SILVER CONFIGURATION

Minimum configuration suitable to reinforce a 100 to 250 people audience area, with high size/power ratio.

EIDOS 265 LA GOLDEN CONFIGURATION

Complete solution suitable to reinforce a 250 to 500 people audience area.


EIDOS 265 LA PLATINUM CONFIGURATION

Complete solution to reinforce a 500 to 700 people audience area.

	EIDOS 265 LA	FLYSUB 15	SUB 118	VEGAS 24	TTM8K4+D
SILVER	8	2	-	-	2
GOLDEN	12	2	4	-	3
PLATINUM	16	4	8	4	5





Eidos 265 LA Silver Configuration.

O1EIDOS265	2-way line-array enclosure: 2×6.5" LF + 2.5" HF diaphragm	8
O1FLYSUB15	Flyable subwoofer, 1 × 15"	2
A FRM-MCMPSS-L	Flying frame for Eidos265LA	2
M V982	Eidos265LA frame connecting bar	2
A FASTQC-LS	Portable Outline loudspeakers tester with soft carrying case	1
A SPK4X4-15	NL4 speaker cable, 4×4 mm ² , length 15m	6
A SPK4X2.5-0.7	NL4 speaker cable, 4 × 2.5 mm ² , length 0.7m	4
A FCE265LA-4P	Flight case suitable for 4 Eidos265LA	2
A SCAP-FLYSUB15	Protective cover for Flysub15 on cart	2
A TROLLEY-14	Touring cart for Flysub15	2
O1TTM8K4+D	4-channel amplifier: 4×2000 W @ 4 ohms	2

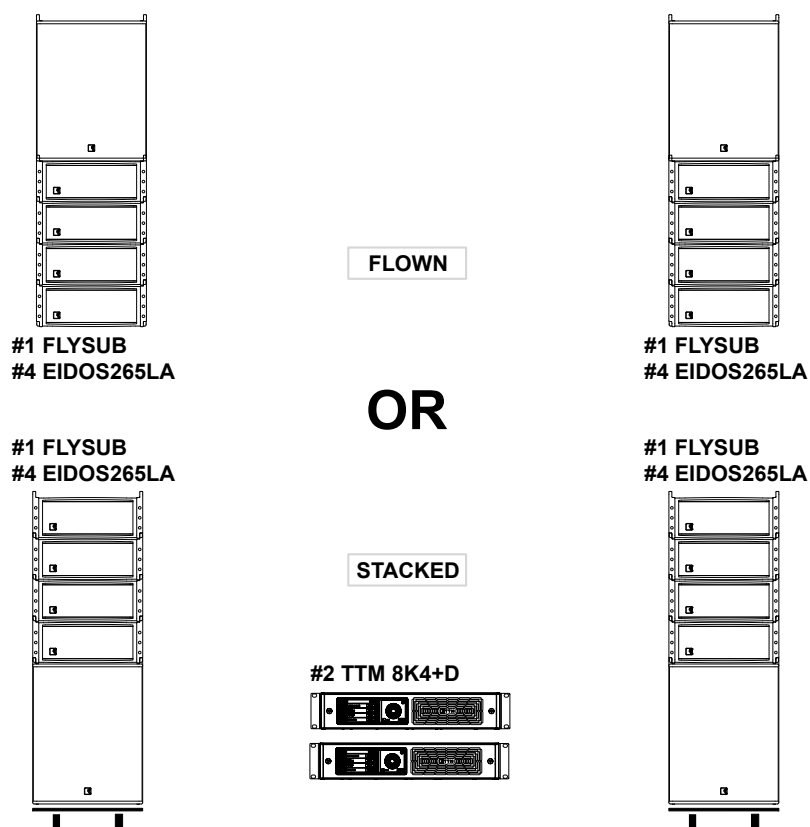

Eidos 265 LA Golden Configuration.


O1EIDOS265	2-way line-array enclosure: 2×6.5" LF + 2.5" HF diaphragm	12
O1FLYSUB15	Flyable subwoofer, 1 × 15"	2
O1SUB118	Ground-stackable subwoofer: 1 × 18"	4
A FRM-MCMPSS-L	Flying frame for Eidos265LA	2
M V982	Eidos265LA frame connecting bar	2
A FASTQC-LS	Portable Outline loudspeakers tester with soft carrying case	1
A SPK4X4-10	NL4 speaker cable, 4 X 4 mm², length 10m	4
A SPK4X4-15	NL4 speaker cable, 4 X 4 mm², length 15m	8
A SPK4X2.5-0.7	NL4 speaker cable, 4 X 4 mm², length 0.7m	6
A FCE265LA-4P	Flight case suitable for 4 Eidos265LA	3
A SCAP-FLYSUB15	Protective cover for Flysub15 on cart	2
A TROLLEY-14	Touring cart for Flysub15	2
A SCAP-SUB118SP	Protective cover for SubSP118 on cart	4
A WHEELBOARD-01	Touring cart/side panel for SUB118	4
O1TTM8K4+D	4-channel amplifier: 4×2000 W @ 4 ohms	3

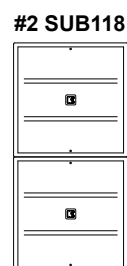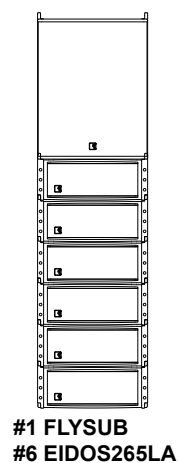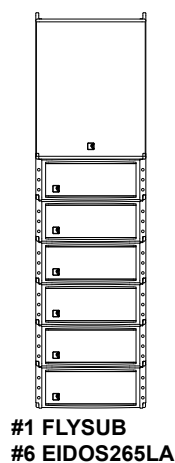


Eidos 265 LA Platinum Configuration.

O1EIDOS265	2-way line-array enclosure: 2×6.5" LF + 2.5" HF diaphragm	16
O1FLYSUB15	Flyable subwoofer, 1 × 15"	4
O1SUB118	Ground-stackable subwoofer: 1 × 18"	8
O1VEGAS24	2-way ultra-compact passive enclosure: 2 × 4" LF + 1.5" HF diaphragm	4
A FRM-MCMPSS-L	Flying frame for Eidos265LA	2
M V982	Eidos265LA frame connecting bar	2
A FASTQC-LS	Portable Outline loudspeakers tester with soft carrying case	1
A SPK4X4-10	NL4 speaker cable, 4 X 4 mm ² , length 10m	12
A SPK4X4-15	NL4 speaker cable, 4 X 4 mm ² , length 15m	10
A SPK4X2.5-0.7	NL4 speaker cable, 4 X 4 mm ² , length 0.7m	10
A FCE265LA-4P	Flight case for 4 Eidos265L	4
A SCAP-FLYSUB15	Protective cover for Flysub15 on cart	4
A TROLLEY-14	Touring cart for Flysub15	4
A SCAP-SUB118SP	Protective cover for SubSP118 on cart	8
A WHEELBOARD-01	Touring cart/side panel for SUB118	8
O1TTM8K4+D	4-channel amplifier: 4×2000 W @ 4 ohms	5

Eidos 265 LA Platinum Configuration.

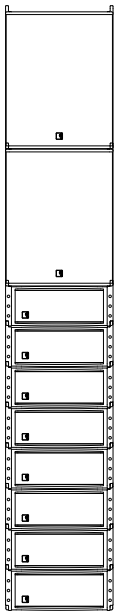

#2 FLYSUB
#8 EIDOS265LA

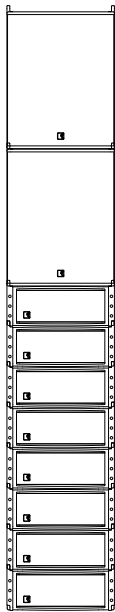


#2 FLYSUB
#8 EIDOS265LA


#4 VEGAS24




#4 SUB118



#4 SUB118




#5 TTM 8K4+D



Eidos 265 LA Silver Wiring.

(half system diagram)

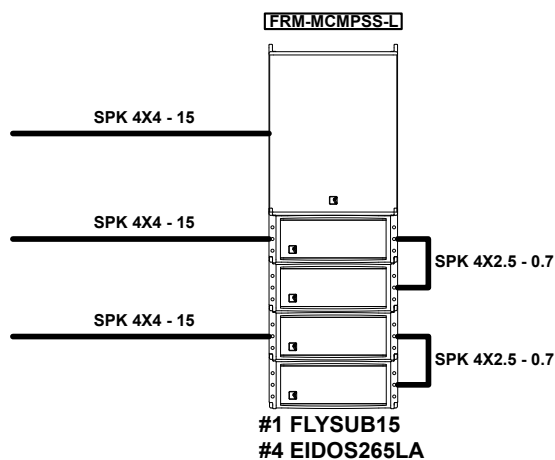


#1 TTM 8K4+D




Eidos 265 LA Golden Wiring.

(half system diagram)

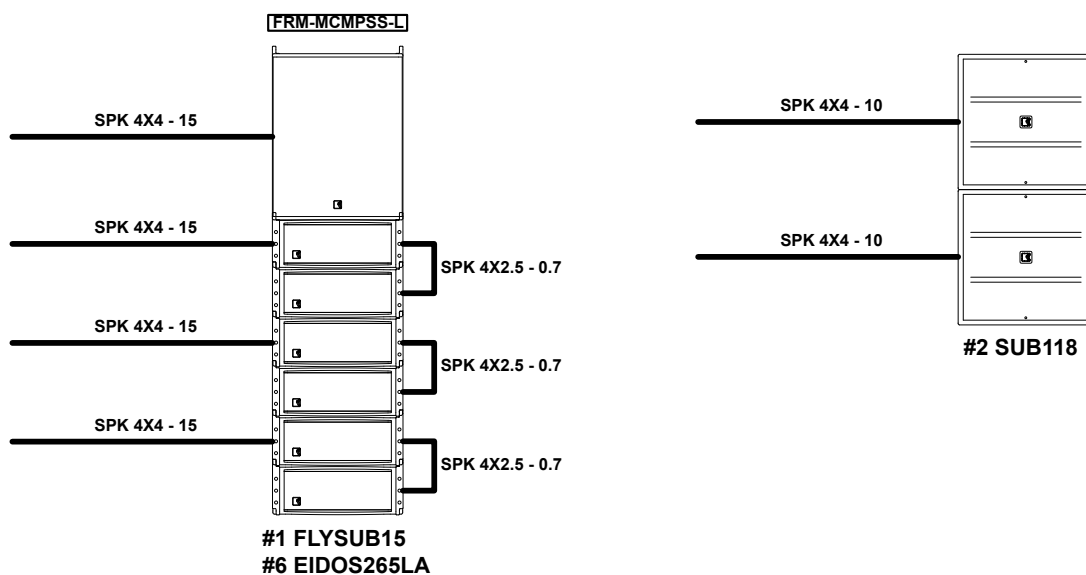


#1½ TTM 8K4+D



Eidos 265 LA Platinum Wiring.

(half system diagram)

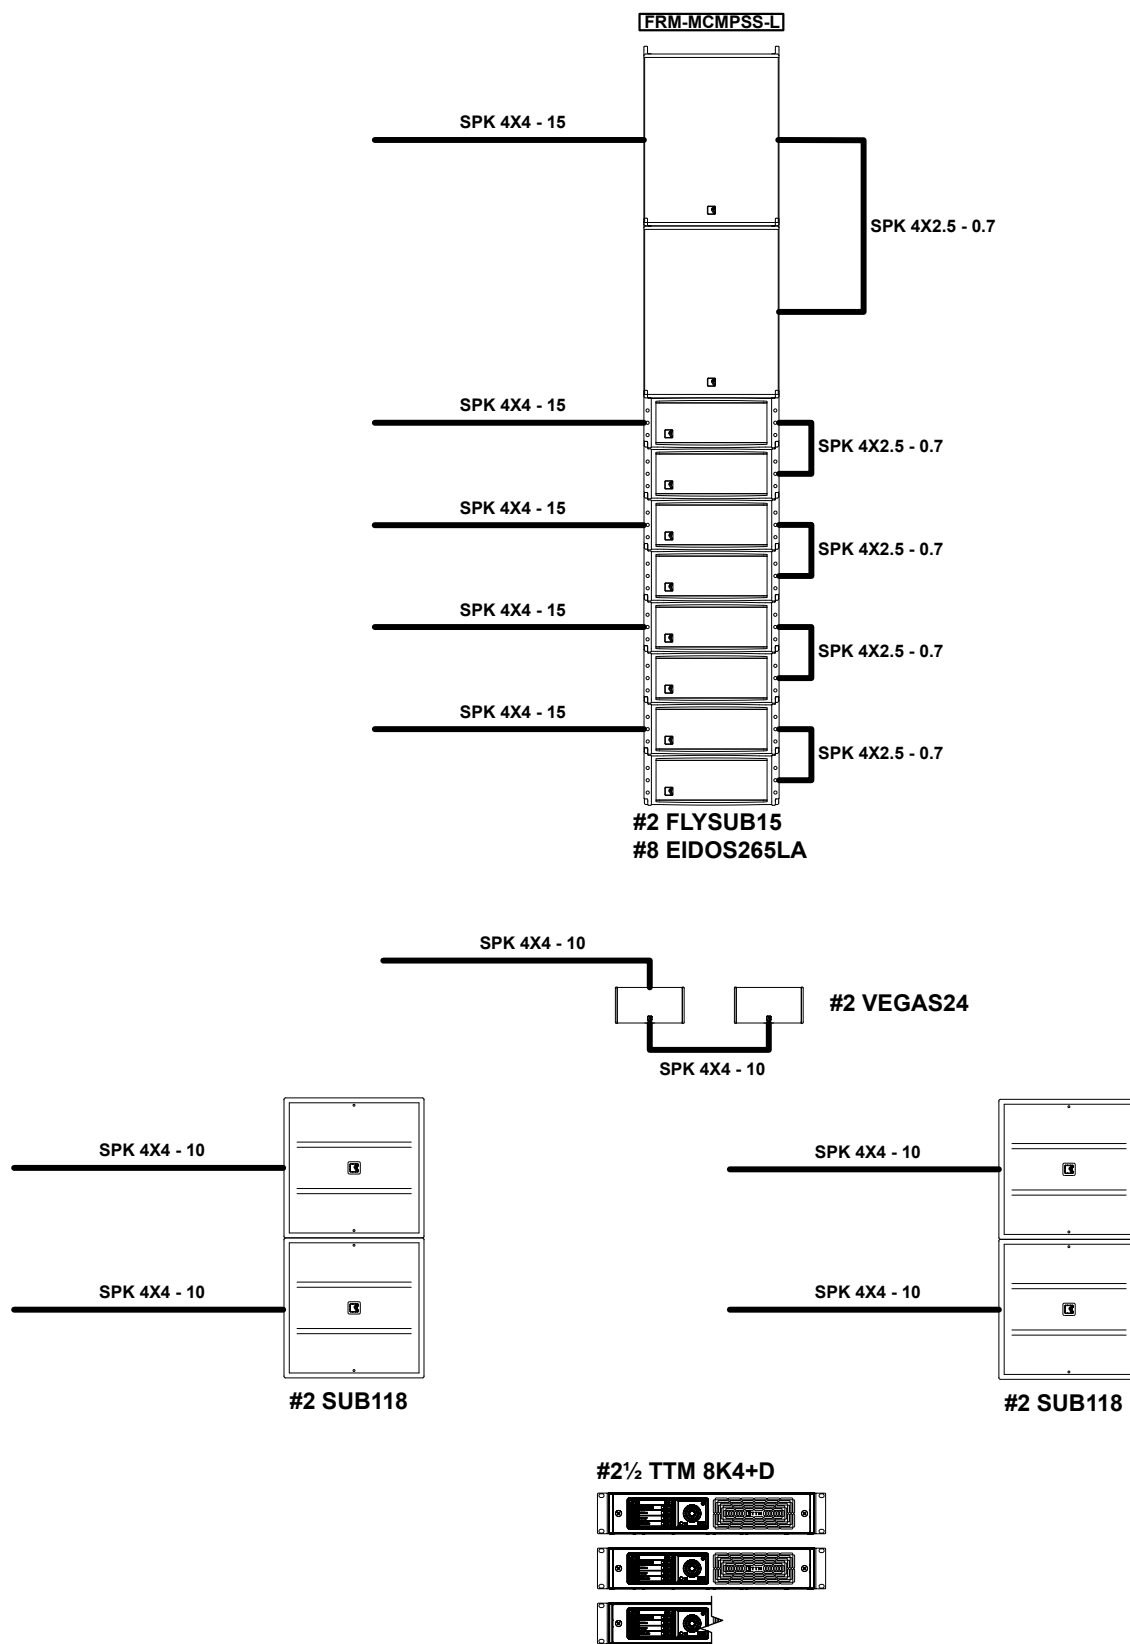



OUTLINE S.R.L.

Via Leonardo Da Vinci, 56 - 25020 Flero (Bs) - Italy

tel. +39 030 35 81 341 - www.outline.it - info@outline.it

VAT IT02902720982

[•-] sound vision.